



1. Unpack the luminaire.



2. Prepare the luminaire for mounting on support rope. Loosen the screws on a bracket.




3. Hang the luminaire on a metal rope.




4. Tighten screws with tightening torque of 8 Nm.



5. Connect the power supply gesis connector.

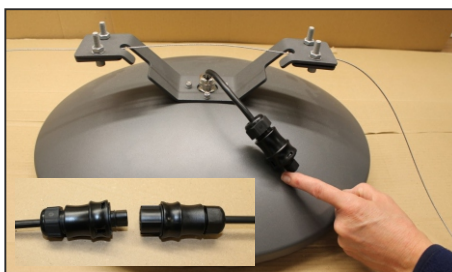


6. Cable connection. Push the cable through the cable gland.

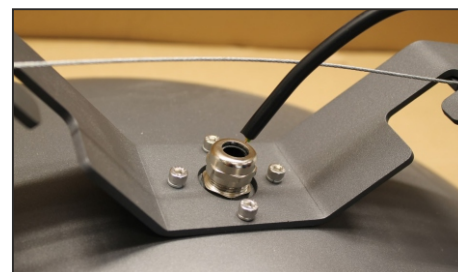


7. Strip the end of the cable and pull it through a cable holder.




8. Connect the cable to the terminal block and tighten the holder. Close the luminaire.

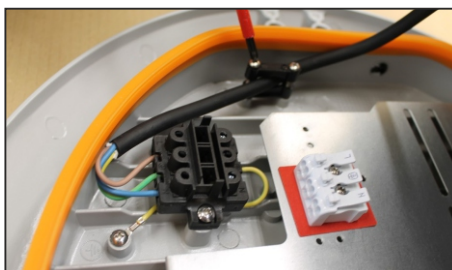


9. Connect the 3 core cable to the power supply (Class I.).

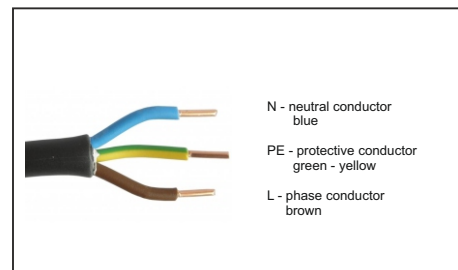


10. Connect the 2 core cable to the power supply (Class II.).



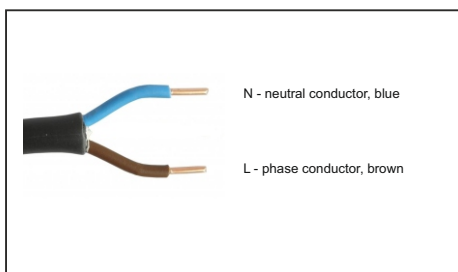


11. Connect the 3 pin connector Gesis to the power supply (Class I.).

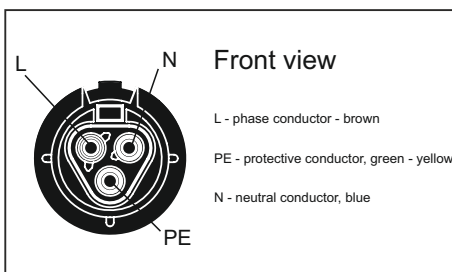

12. Connect the 2 pin connector Gesis to the power supply (Class II.).

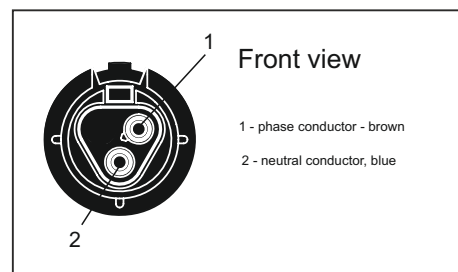

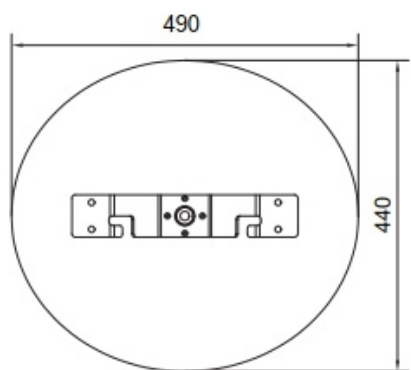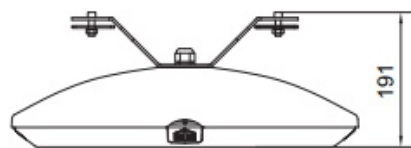

- Recommended installation height up to 12 meters.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light sources in this luminaire is only replaceable by the manufacturer or their technicians or a qualified person.

- Caution, risk of electric shock 


- Do not look directly or with optical aids into the light source RG1 d > 0,5 m



- This luminaire operates at mains voltage 220-240V, 50-60 Hz.

- Any modification to this luminaire is forbidden.

- Replace any cracked protective shield.



Cleaning:

clean the luminaire with the standard detergents. DO NOT use any abrasive detergents or solvents.

Installation and maintainance:

can provide only a person with an electrical qualification.

ELEKTRO-LUMEN, s. r. o.
 Hranická 505
 753 61 Hranice IV - Drahotuše
 Česká republika

Telefon: +420 581 699 411
Fax: +420 581 699 419
E-mail: el-lumen@el-lumen.cz
Web: www.el-lumen.cz



The company reserves the right to change technical data and printing errors.
 Copyright © ELEKTRO-LUMEN, s. r. o.