

DIONE 16 LED

DATASHEET | SPECIFICATIONS



TECHNICAL SPECIFICATIONS

ELECTRICAL PARAMETERS

Light source	» LED
AC voltage	» AC 230 V / 50 Hz » DC 230 V
Connection	» terminal block
Driver	» converter
Dimming	» NO
Emergency module	» integrated emergency module, the autonomy of 3 hour (NM3/M3) ⁽¹⁾

LIGHT PARAMETERS

Optical system	» diffuser
Viewing distance	» 20 m (100 lm)
Color rendering index	» Ra > 80
Color temperature	» 5 000 K
Service life	» > 30 000 hours (L70B50)

CONSTRUCTION

Housing	» ABS plastic injection-moulding
Color	» RAL 9018
Surface	» matte
Cover	» polycarbonate (no label)

SAFETY

Protection class	» I
Ambient operating temperature	» +5 / +40 °C
Electrical part protection	» IP 65
Optical part protection	» IP 65
Mounting on normally flammable materials	» YES

MOUNTING

Type	» surface mounted
Recommended height	» from 2 to 10 m

ACCESSORIES

Clips	» NO
Mounting accessories	» NO
Set of pictograms	» ANO

NOTES


⁽¹⁾ NM3 - it only lights when a power failure occurs

CHARACTERISTIC

Interior emergency LED luminaire with pictogram.

USE

Corridors Offices Warehouses
Production halls

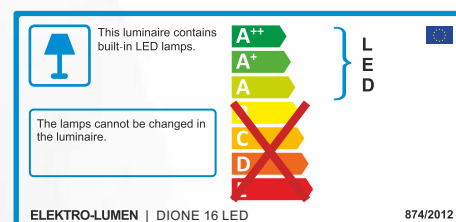

DIMENSIONS

DIONE 16 LED

