


1. Unpack the luminaire.



2. Prepare the individual parts of the luminaire: the luminaire itself; mounting adapter for the grid and two locking clips.

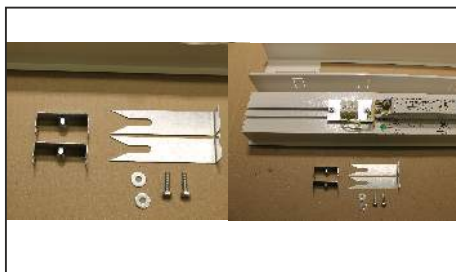

3. Insert the holders with nuts into the body groove from both sides.



4. Bend the locking clips outward on the mounting adapter.



5. Insert the mounting adapter into the prepared grid.




6. The bent locking clips will rest against the grid rib. Push the mounting adapter fully into the grid.



7. Insert the luminaire from below into the mounting adapter. Do not press on the plastic diffuser during this operation!




8. From the inside, slide the locking clips under the heads of the M4 screws.

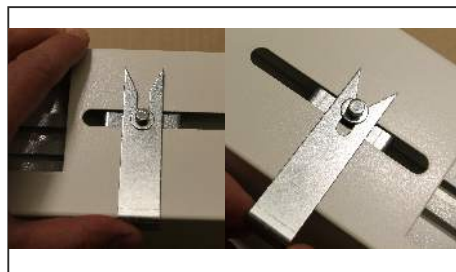

9. After inserting the locking clips, tighten the screws.



10. Connect the power cable.

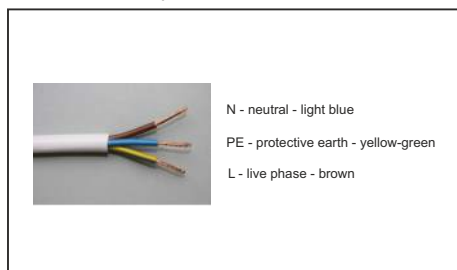

11. Close the ceiling panel.



**MAINTENANCE**

Maintenance and repairs must be carried out in a de-energized state.

**CLEANING**

The luminaire can be cleaned with standard cleaning agents. Do not use abrasive cleaning agents (powders) or solvents. Clean the polished surface of the reflector with a brush dipped in an alcohol-based cleaner.

**WARRANTY**

According to the valid general business conditions of ELEKTRO-LUMEN, s. r. o., the warranty on the supplied goods, except for batteries for emergency power sources, is 24 months from the date of receipt. The warranty on batteries for emergency power sources is 6 months from the date of receipt, provided that proper battery formatting has been carried out. This does not apply to contractual warranties.

**SAFETY AND HEALTH PROTECTION AT WORK (BOZP)**

When installing and working with the luminaire, follow the safety and health protection rules at work. Possible risks include: working at heights, falling small objects and shavings, sharp edges, electric shock, etc. Basic protective equipment to be used according to the situation and tools used: work clothes and shoes, protective goggles, safety helmet, protective gloves, reflective vest, and hearing protection (not provided by ELEKTRO-LUMEN, s. r. o.).

**NOTICE**

The photos in the installation manual are for illustrative purposes only. Installation and electrical connection must be carried out by personnel with electrotechnical qualifications according to Decree 50/78 Coll. Luminaires can only be operated if they are undamaged and clean. The manufacturer accepts no responsibility if the product has been modified or improperly installed. Installation and use must be in accordance with the general Technical requirements, which are publicly available on the website: <http://el-lumen.cz/o-spolecnosti/dokumenty/>

**DISCLAIMER**

Changes without prior notice reserved. Errors and omissions excepted. Always make sure you are using the latest version of the installation manual (available at [www.el-lumen.cz](http://www.el-lumen.cz)).

ELEKTRO-LUMEN, s. r. o.  
Hranická 505,  
753 61 Hranice IV  
Czech Republic

The company reserves the right to change technical data and printing errors.  
Copyright © ELEKTRO-LUMEN, s. r. o.

