


# GUFA 80

## DATASHEET | SPECIFICATIONS

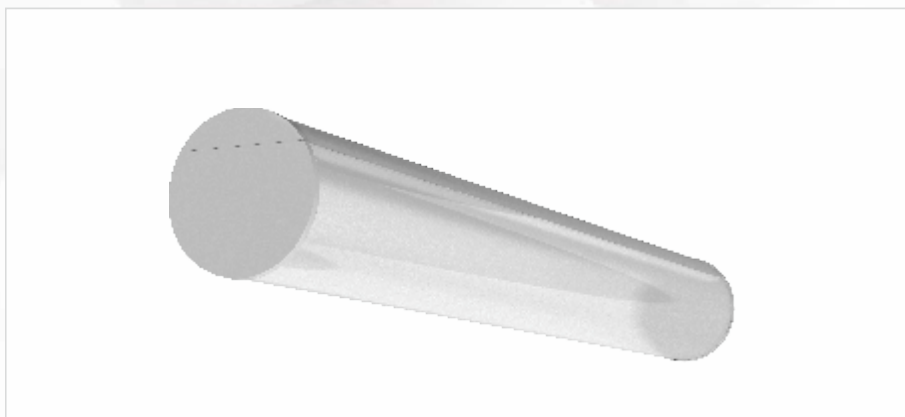

### CHARACTERISTIC


Design LED lamp designed for representative spaces with the option of being attached or suspended.

### USE

- Interior
- Corridors
- Office
- Classroom
- Commercial premises
- Representative spaces




TECHNICAL SPECIFICATIONS	
<b>ELECTRICAL PARAMETERS</b>	
Light source	» LED
AC voltage	» AC 230 V / 50 Hz
Connection	» terminal block
Driver	» electronic driver
Dimming	» non-dimmable (not labeled) » DALI (DALI)
Emergency module	» NO
<b>LIGHT PARAMETERS</b>	
Optical system	» diffuser
Light distribution	» direct
Color rendering index	» Ra > 80
Color temperature	» 3 000 K » 4 000 K
Service life	» > 60 000 hod. (L80B10)
<b>CONSTRUCTION</b>	
Housing	» powder-coated steel sheet
Color	» white (without markings) » other shades according to the RAL swatch
Surface	» matte
Cover	» opal (DSO)
<b>SAFETY</b>	
Protection class	» I
Ambient operating temperature	» max. +5 / +35 °C
Luminaire cover	» IP 40
Fire hazard	» YES
<b>MOUNTING</b>	
Type	» fitment (without marking) » suspension (Z)
Recommended height	» max up to 8 m
<b>ACCESSORIES</b>	
Mounting accessories	» according to the variant

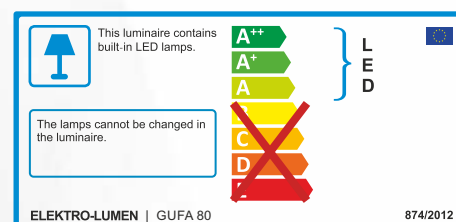

### DIMENSIONS

GUFA 80

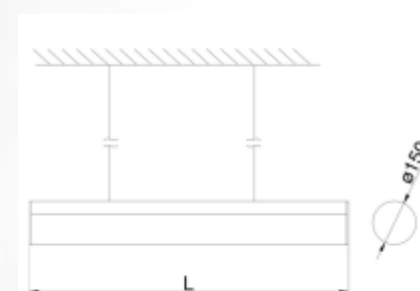

L (mm) - 600, 900, 1200, 1500

# VARIANTS

## DATASHEET GUFA 80

name	TYPE	POWER (W)	LUMINOUS FLUX	COLOR TEMPERATURE	SERVICE LIFE
		Watt (W)	Lumen (lm)	Kelvin (K)	L80B10 (hod.)
GUFA 80	600 DSO 1x20W 840	20	2 870	4 000	> 60 000
GUFA 80	900 DSO 1x25W 840	25	4 310	4 000	> 60 000
GUFA 80	1 200 DSO 1x35W 840	35	5 750	4 000	> 60 000
GUFA 80	1 500 DSO 1x40W 840	40	7 190	4 000	> 60 000

### LEGEND

GUFA Z 80 600 DSO 1x20W 840 DALI

	name
	variantforsuspension(Z)
	výška svítidla 80 mm
	lampheight80mm
	opal (DSO)
	powerfulvariant(W)
	color rendering index Ra>80,color temperature 4000K
	DALI (DALI)