



# PYTHON

DATASHEET | SPECIFICATIONS



**PHOTOS**



**CHARACTERISTIC**

Interior LED luminaire.

**USE**

- Corridors
- Offices
- Sanitary facilities

| TECHNICAL SPECIFICATIONS                 |                             |
|--|-----------------------------|
| ELECTRICAL PARAMETERS                    |                             |
| Light source                             | » LED                       |
| AC voltage                               | » AC 230 V / 50 Hz          |
| Connection                               | » terminal block            |
| Driver                                   | » electronic driver         |
| Dimming                                  | » NO                        |
| Emergency module                         | » NO                        |
| LIGHT PARAMETERS                         |                             |
| Optical system                           | » diffuser                  |
| Light distribution                       | » direct                    |
| Color rendering index                    | » Ra > 80                   |
| Color temperature                        | » 4 000 K                   |
| Service life                             | » 30 000 hours (L80B50)     |
| CONSTRUCTION                             |                             |
| Housing                                  | » powder-coated steel sheet |
| Color                                    | » RAL 9003                  |
| Surface                                  | » matte                     |
| Cover                                    | » opal (no label)           |
| SAFETY                                   |                             |
| Protection class                         | » I                         |
| Ambient operating temperature            | » +5 / +35 °C               |
| Electrical part protection               | » IP 40                     |
| Optical part protection                  | » IP 40                     |
| Mounting on normally flammable materials | » NO                        |
| MOUNTING                                 |                             |
| Type                                     | » surface mounted           |
| Recommended height                       | » to 4 m                    |
| ACCESSORIES                              |                             |
| Clips                                    | » NO                        |
| Mounting accessories                     | » NO                        |



This luminaire contains built-in LED lamps.


The lamps cannot be changed in the luminaire.

**A++**  
**A+**  
**A**  
**C**  
**D**

**LED**

ELEKTRO-LUMEN | PYTHON 874/2012

**LIGHT DISTRIBUTION CURVE**

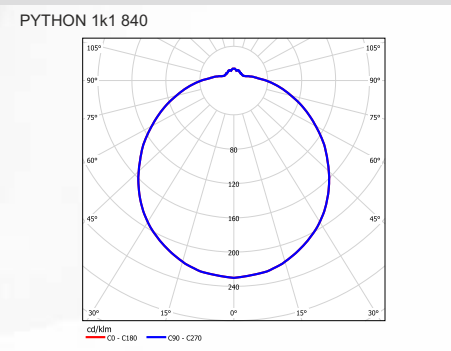

# VARIANTS

## DATASHEET PYTHON

| TYPE               | POWER    | LUMINOUS FLUX | COLOR TEMPERATURE | SERVICE LIFE   | WEIGHT        |
|--------------------|----------|---------------|-------------------|----------------|---------------|
| <b>Name</b>        | Watt (W) | Lumen (lm)    | Kelvin (K)        | L80B50 (hours) | Kilogram (kg) |
| PYTHON 290 1k5 840 | 14       | 1 500         | 4 000             | 30 000         | 0,5           |
| PYTHON 430 2k7 840 | 24       | 2 700         | 4 000             | 30 000         | 1,0           |

### LEGEND

#### PYTHON 290 1k5 840

|   |  |
|---|--|
|  | name   |
|   | dimensions 290 mm  |
|   | luminous flux 1 500 lm                                   |
|   | color rendering index Ra > 80, color temperature 4 000 K |

Optical and electrical parameters tolerance  $\pm 10\%$ .

### DIMENSIONS

#### PYTHON

