


RONDA S 111

DATASHEET | SPECIFICATIONS

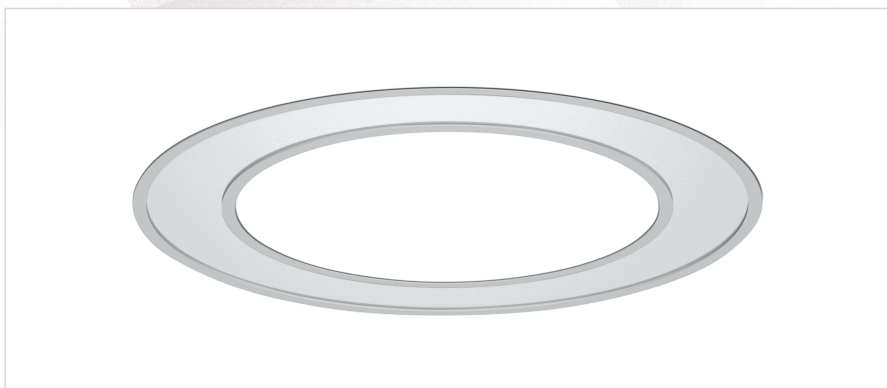


CHARACTERISTIC

Design ring LED ceiling light designed for representative spaces.


USE

- interior
- office
- classrooms
- commercial premises
- Corridors
- representative spaces

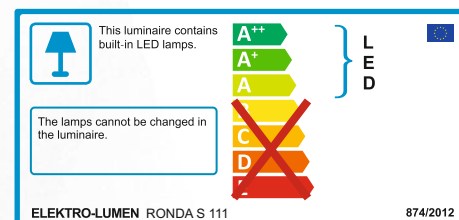

LUMINAIRE DIMENSIONS

RONDA S 111

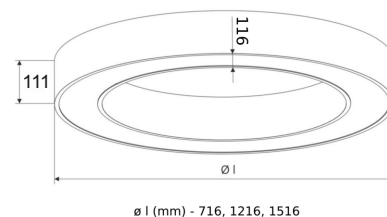

TECHNICAL SPECIFICATIONS

ELECTRICAL PARAMETERS

Light source	» LED
AC voltage	» AC 230 V / 50 Hz
Connection	» terminal block
Driver	» electronic driver
Dimming	» non-dimmable (not labeled) » DALI (DALI)
Emergency module	» NO

LIGHT PARAMETERS

Optical system	» difuzor
Light distribution	» direct
Color rendering index	» Ra > 80
Color temperature	» 3 000 K » 4 000 K
Service life	» > 60 000 hours (L80B10)

CONSTRUCTION

Housing	» painted aluminum
Color	» white (without markings) » other shades according to the RAL swatch
Surface	» mat
Cover	» opal (DSO)

SAFETY

Protection class	» I
Ambient operating temperature	» +5 / +35 °C
Electrical part protection	» IP 40
Mounting on normally flammable materials	» YES

MOUNTING

Type	» embedmen (S)
Recommended height	» to 8 m

ACCESSORIES

Mounting accessories	» according to the variant
----------------------	----------------------------

VARIANTS

DATASHEET RONDAS 111

TYPE	POWER	LUMINOUS FLUX	COLOR TEMPERATURE	SERVICE LIFE
Name	Watt (W)	Lumen (lm)	Kelvin (K)	L80B10 (Std.)
RONDA S 111 700 DSO 35W 840	36	5 910	4 000	> 60 000
RONDA S 111 700 DSO 70W 840	77	11 170	4 000	> 60 000
RONDA S 111 1 200 DSO 70W 840	74	11 700	4 000	> 60 000
RONDA S 111 1 200 DSO 105W 840	115	17 480	4 000	> 60 000
RONDA S 111 1 500 DSO 105W 840	111	17 560	4 000	> 60 000
RONDA S 111 1 500 DSO 140W 840	152	22 610	4 000	> 60 000

LEGEND

RONDA S 111 700 DSO 35W 840 DALI

	name
	lamp height 111mm
	lamp diameter
	opal (DSO)
	power (W)
	color rendering index Ra > 80, color temperature 4000K
	DALI (DALI)

Optical and electrical parameters tolerance +/- 10%.