

VESUV 80

DATASHEET | SPECIFICATIONS



CHARACTERISTIC

Design LED lamp designed for representative spaces with the option of being attached or suspended.

USE

- Offices
- Classrooms
- Corridors
- interior
- commercial premises
- representative spaces



TECHNICAL SPECIFICATIONS

ELECTRICAL PARAMETERS

Light source	» LED
AC voltage	» AC 230 V / 50 Hz
Connection	» terminal block
Driver	» electronic driver
Dimming	» non-dimmable (not labeled) » DALI (DALI)
Emergency module	» NO

LIGHT PARAMETERS

Optical system	» diffuser
Light distribution	» direct
Color rendering index	» Ra > 80
Color temperature	» 3 000 K » 4 000 K
Service life	» > 60 000 hours (L80B10)

CONSTRUCTION

Housing	» lacquered aluminum
Color	» white (without markings) » other shades according to the RAL swatch
Surface	» matte
Cover	» opal (DSO)

SAFETY


Protection class	» I
Ambient operating temperature	» +5 / +35 °C
Luminaire cover	» IP 40
Mounting on normally flammable materials	» YES

MOUNTING

Type	» fitment (without marking) » suspension (Z)
Recommended height	» max up to 8 m


ACCESSORIES

Mounting accessories	» according to the variant
----------------------	----------------------------

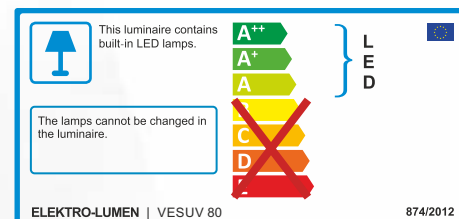

DIMENSIONS

VESUV 80

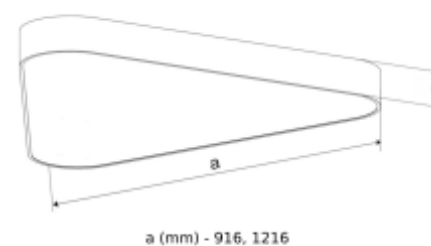

VARIANTS

DATASHEET VESUV 80

TYPE	POWER	LUMINOUS FLUX	COLOR TEMPERATURE	SERVICE LIFE
Name	Watt (W)	Lumen (lm)	Kelvin (K)	L80B10 (hod.)
VESUV 80 900 DSO 70W 840	80	9 600	4 000	> 60 000
VESUV 80 900 DSO 105W 840	120	14 400	4 000	> 60 000
VESUV 80 1 200 DSO 105W 840	120	14 400	4 000	> 60 000
VESUV 80 1 200 DSO 140W 840	160	19 200	4 000	> 60 000

LEGEND

VESUV Z 80 900 DSO 70W 840 DALI

	name
	variant for suspension (Z)
	lamp height 80 mm
	lamp diameter
	opal (DSO)
	power (W)
	color rendering index Ra > 80, color temperature 4 000 K
	dimming DALI (DALI)

Optical and electrical parameters tolerance +/- 10%.